


## TIMED CONNECTOR

4401002 024 VAC VDC - 4401004 115 230 VAC

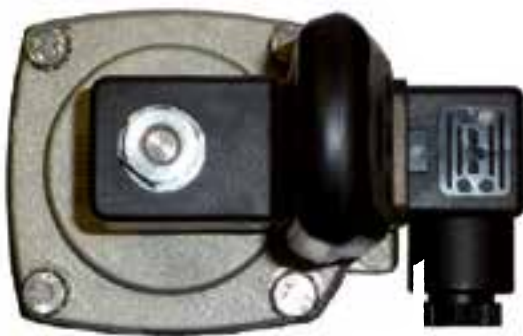

## TECHNICAL FEATURES

Pause	0.1 sec to 99 hours, settable
Activation time	0.1 sec to 99 hours, settable
Manual setting	Yes, micro-switch
Power supply range	024-VAC-VDC 115-230 VAC
Current consumption	7 mA max
Operating temperature	-10°C - +55°C
Protection rating	IP65 NEMA 4
Container material	FR ABS
Type of connection	EN175301-803 (ex DIN 43650A)
Indicators	LED
Standard design	VDE 01 10C

Analogue version of the timer available with power supply range 024÷240 Vac Vdc with code 4401006